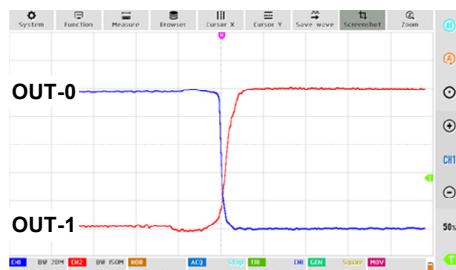
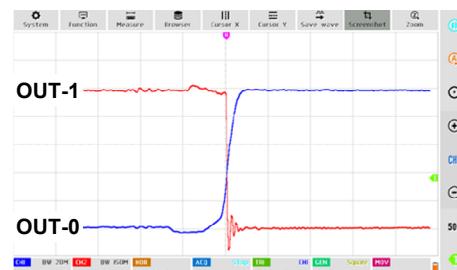
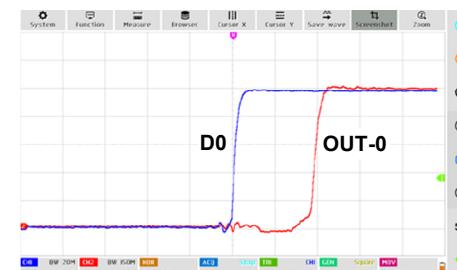
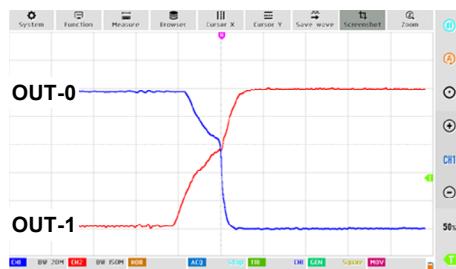
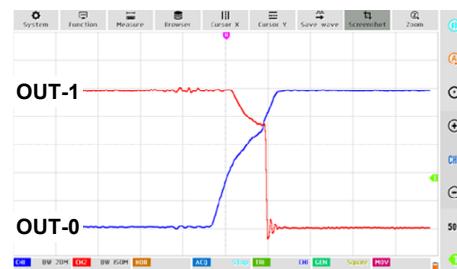
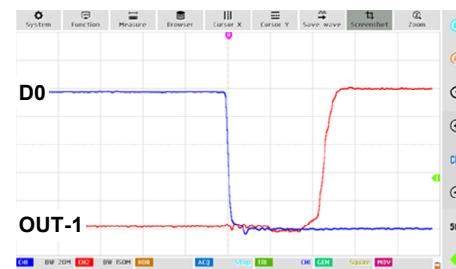
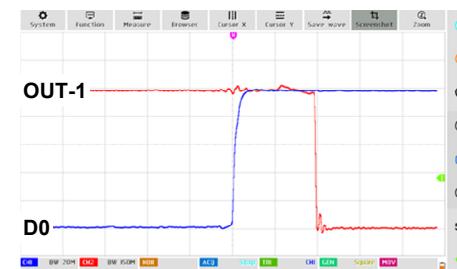
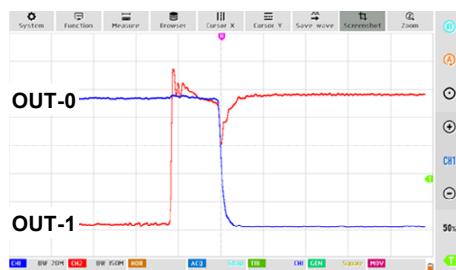
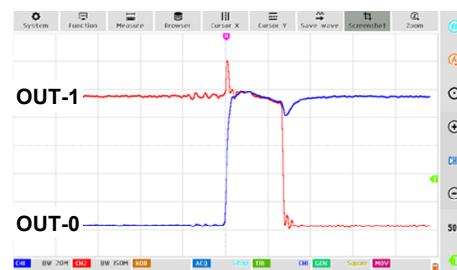
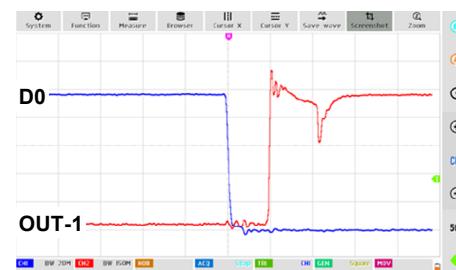
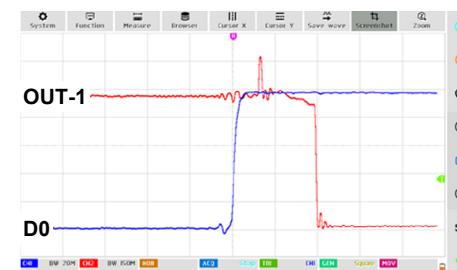


## REVISION HISTORY

REV	DESCRIPTION	APPROVAL	DATE
-	Initial release	J Taylor	2026/01/04

Switching time: H to L /  $R_L$  = OpenSwitching time: L to H /  $R_L$  = OpenPD: H to L /  $R_L$  = OpenPD: L to H /  $R_L$  = OpenSwitching time: H to L /  $R_L$  = 1KSwitching time: L to H /  $R_L$  = 1KPD: H to L /  $R_L$  = OpenPD: L to H /  $R_L$  = OpenSwitching time: H to L /  $R_L$  = 22ΩSwitching time: L to H /  $R_L$  = 22ΩPD: H to L /  $R_L$  = 22ΩPD: L to H /  $R_L$  = 22Ω

TITLE

4 channel H-Bridge driver timing

SIZE	FSCM NO	DRAWING NO	REV
A		1749T	-
SCALE	NONE	© 2025 TES	MODIFIED: 01/04/26 01:09 PM

1 OF 1